


## ECO-WORTHY SOLAR TRACKER CONTROLLER 2021

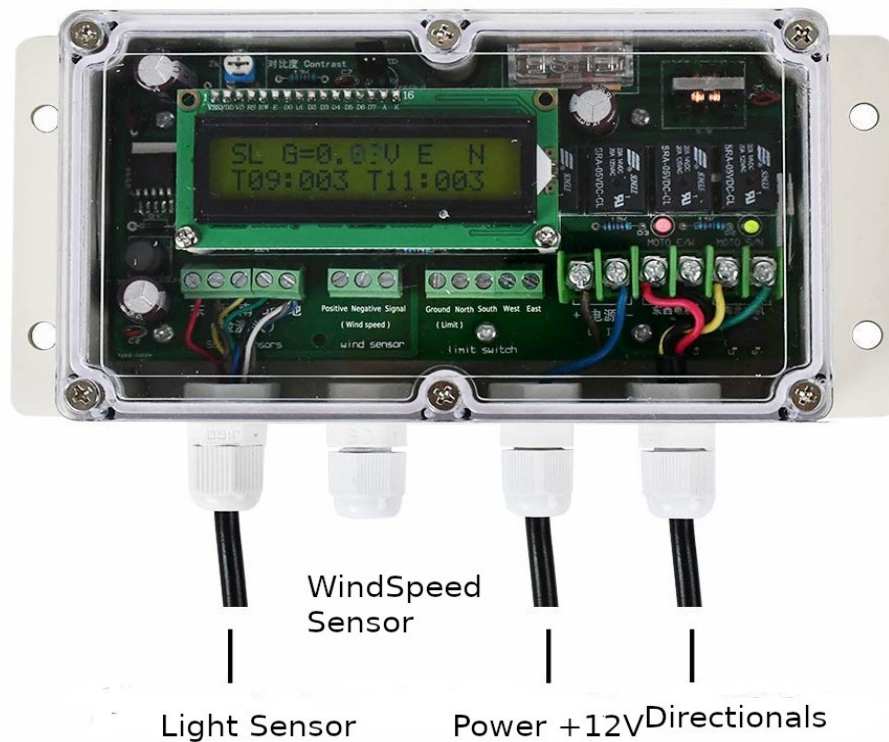

### Contents:

1. Parameters of the LCD display
2. Setting the Parameters for No Sunshine or High Winds

### Parameters of the LCD display:

AT Automatic Tracking State

TX Waiting period after automatic tracking alignment in seconds

TY Waiting period after automatic tracking alignment in seconds

E,W, N,S East, West, North, South

V	Voltage
FS	Wind Speed
FSLOCK	
F	voltage value of wind speed
SH	Shadow/Cloudy automatic tracking state
MT	Manual operation state
SL	Weak Sunshine
T3	Device drive time eastward after high wind speeds sensed
T4	Device drive time westward ?
T5	Device drive time northward after high wind speeds sensed
T6	Device drive time southward after T5 in seconds after high wind speeds sensed
T7	High wind Self lock time (600 seconds?)
T8	Delay for weak sunshine duration (30 minutes/1800 seconds)
T9	Device drive time eastward (weak sunshine) (recommend east to west time * 1.2)
T10	Device drive time westward (weak sunshine) west to east to final position.
T11	Device drive time northward (weak sunshine) (recommend south to north * 1.2)
T12	Device drive time southward (weak sunshine) north to south final position.
T13	Weak Sunshine recover time (recommend 10).
V1	Tracking precision voltage accuracy (perhaps east west)
V2	Wind speed control voltage value (hysteresis to wind speed set voltage 0.015).
V3	Weak Sun control voltage value – all four heads less than this value (currently 1.50V)

### Setting Parameters for No Sunshine or High Winds

When the device detects weak sunshine or high wind it begins by moving Eastward T9 seconds (for sun) or T3 seconds (for wind). It then moves Westward for T10 seconds (for sun) or T4 seconds (for wind). Next it moves T11 seconds (for sun) or T5 seconds (for wind) towards the North. Then it

moves T12 seconds (for sun) or T6 seconds (for wind) South. The device then waits T13 seconds (for sun) or T7 seconds (for wind) before it will begin to track if the low sun or high wind condition is not detected again while it is waiting.

Left and right arrows change which parameter is being set, up or down arrows change parameter values.

Hold SET key for 5 seconds to enter parameters from the manual mode.

Holding the QUIT key for 5 seconds in the automatic mode turns background light on and off.

Notes: All time values were 10 seconds from the factory T3-T13

TX and TY were 10 seconds.

V1 0.02 Volts

V2 0.20 Volts

V3 1.50 Volts

Measured time from West to East was 35 seconds

Measured time from South to North was 21 seconds.

New set times:  $T9 = 25 * 1.2 = 42$  seconds East

$T10 = 35 / 2 = 17.5 \rightarrow 18$  seconds West

$T11 = 21 * 1.2 = 25$  seconds North

$T12 = 21 / 2 = 10.5 \rightarrow 10$  seconds South

Set February 22, 19:20

February 24 11:20

T9 = 42 seconds East.

T10 = 19 seconds West (empirically more level).

T11 = 25 seconds North

T12 = 0 seconds South (no need to move South).